

Encore Acoustic Pendant


A linear, suspended acoustic light fixture designed to accommodate four narrow beam downlights. The body is an elongated oval thick acoustic panel, serving as both a sleek lighting solution and an effective surface for sound absorption.



PENDANT OVERVIEW

Part Number	A649217
Applications	Interior
Construction Material	Polyester PET
IP Rating	IP20
Mounting	Suspended
Weight (kg)	8.8
Warranty	3 years
Dimensions (mm)	L1400 x W400 x H9
Acoustic Values (NRC)	0.91

DIMENSIONS (mm)

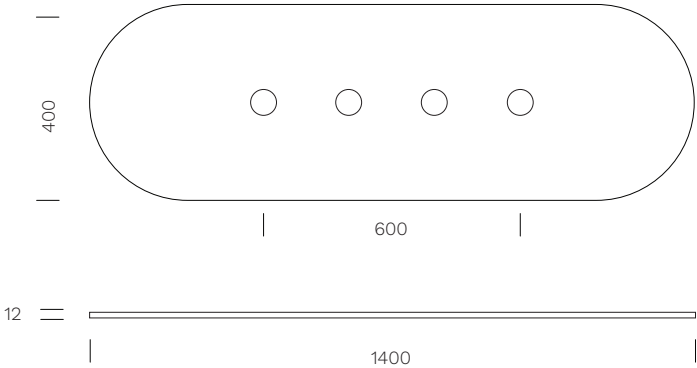

Encore Acoustic Pendant

LUMINAIRE OVERVIEW

Applications	Interior
Diffuser Type	PMMA
Construction Material	Aluminium
IP Rating	IK20
Ambient Temperature	-20°C to +45°C (0°C to 40°C for emergency)
Colour	White finish, gun metal reflector

LUMINAIRE OUTPUT

Colour Temperature	3000K or 4000K (Suffix /3K or /4K)
CRI	>90Ra
Efficacy	~99 Lm/W
Beam Angle	15° (standard), 38° or 55° (Suffix /38D or /55D)
Operating Hours	50,000
Macadam Ellipse	≤3 sdcm
L70 B50	100,000 hours
LEDs	Single Bin CREE
Wattage	6W
Lumens @4000K	592Lm
Inrush Current	2A
Voltage Range	AC220-240V
Power Factor	>0.90
Driver	Remote
Protection Class IEC	Class II



DIMENSIONS (mm)

